




相同企業有限公司
SAME CO., LTD

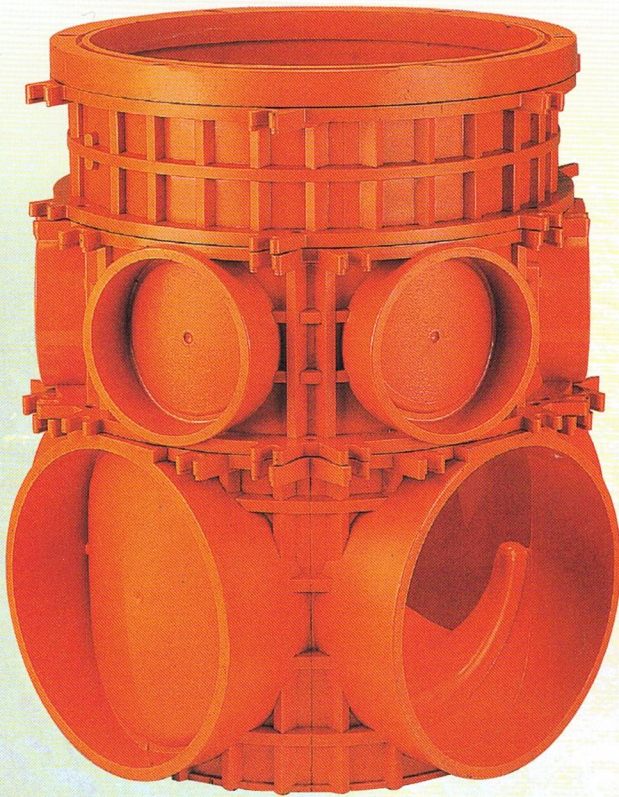

家庭污水配管箱
Kitchen Sewage Piping Box

適用範圍

污水下水道系統、電信電力之手孔、社區生活污水管線連接、屋角集水陰井

APPLICATIONS:

Sewage line system, Hand of Telecommunications and Electricity, Community sewage pipe connection, fastigium catchment well.


【多功能接管大小頭】

Multifunction connect hole



特性和優點

1. 採複合工程塑膠，強度佳，可承受12噸以上正壓之高抗壓能力。
2. 圓型設計角度可配合管線方向調整，且各面均有4"Ø及 8"Ø承口接管，使本體各方均能垂直連接進水管而不需彎曲加工。
3. 接管承口配以自來水級止洩橡膠，確保配管箱之密封，克服習用預鑄混凝土易滲漏污染環境安全之環保問題，有避震及防止輕微之位移漏水現象。
4. 因材質為工程塑膠且為組合式，故可配合工程需要調整高度，而且重量輕，組裝搬運及施工相當簡便不需使用吊車，施工亦不受狹窄防火巷之限制，能有效節省施工時間及成本。
5. 本體採SUS304不鏽鋼螺絲連結耐久性高。
6. 材質為塑膠，故本體不導電。

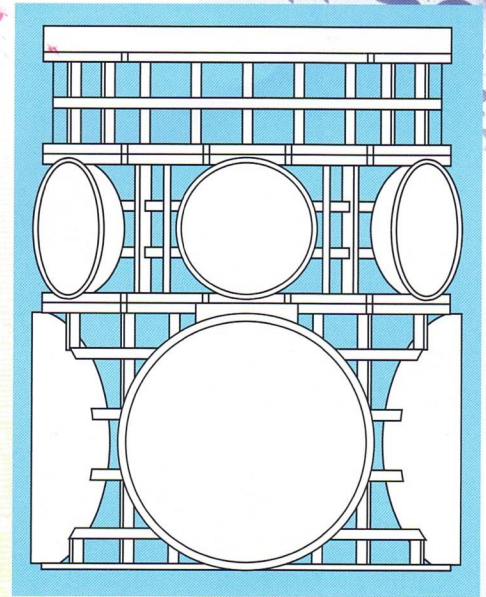

FEATURES:

1. Complex plastics are sued: great strength. Its resistance to pressure is tested up to reach 12 tons.
2. The design has 4" and 8" bearings on all its sides So that the housing can vertically be connected to the water pipes on all of its sides and the connecting pipes do not need to bent or processed.
3. The bearing of the connecting pipes are equipped with water -proof rubber for the sealing of piping box and to prevent the habitual use of pre-cast concrete well from easily leaking and polluting the environment. There is the set-up for shockproof set- up and minute displacement prevention.
4. Materials are plastics and assembled so that they are light and easily transported and assembled. They are convenient and do not need any cranes. It is not subject to the restriction of narrow fireproof lane at the time of construction and can effectively save time and costs.
5. The housing uses sus304 stainless steel screw with high durability.
6. It is made of plastics so that the housing is not conductive.

規格

內徑345m/m (組合成型且可隨意加高)

SPECIFICATIONS:

Diameter 345m/m(Assembled and height increased at your will)

單位：mm

| 墊層 Ceiling layer | 墊層 Ceiling layer | 墊層 Ceiling layer | Ø100mm 6孔中間層 Six holes middle layer | Ø200mm 4孔底層 Four holes base |
|---------------------|---------------------|---------------------|----------------------------------------|--------------------------------|
| 25 | 100 | 300 | 150 | 255 |

